




MS9710B

Optical Spectrum Analyzer

0.6 to 1.75 μm

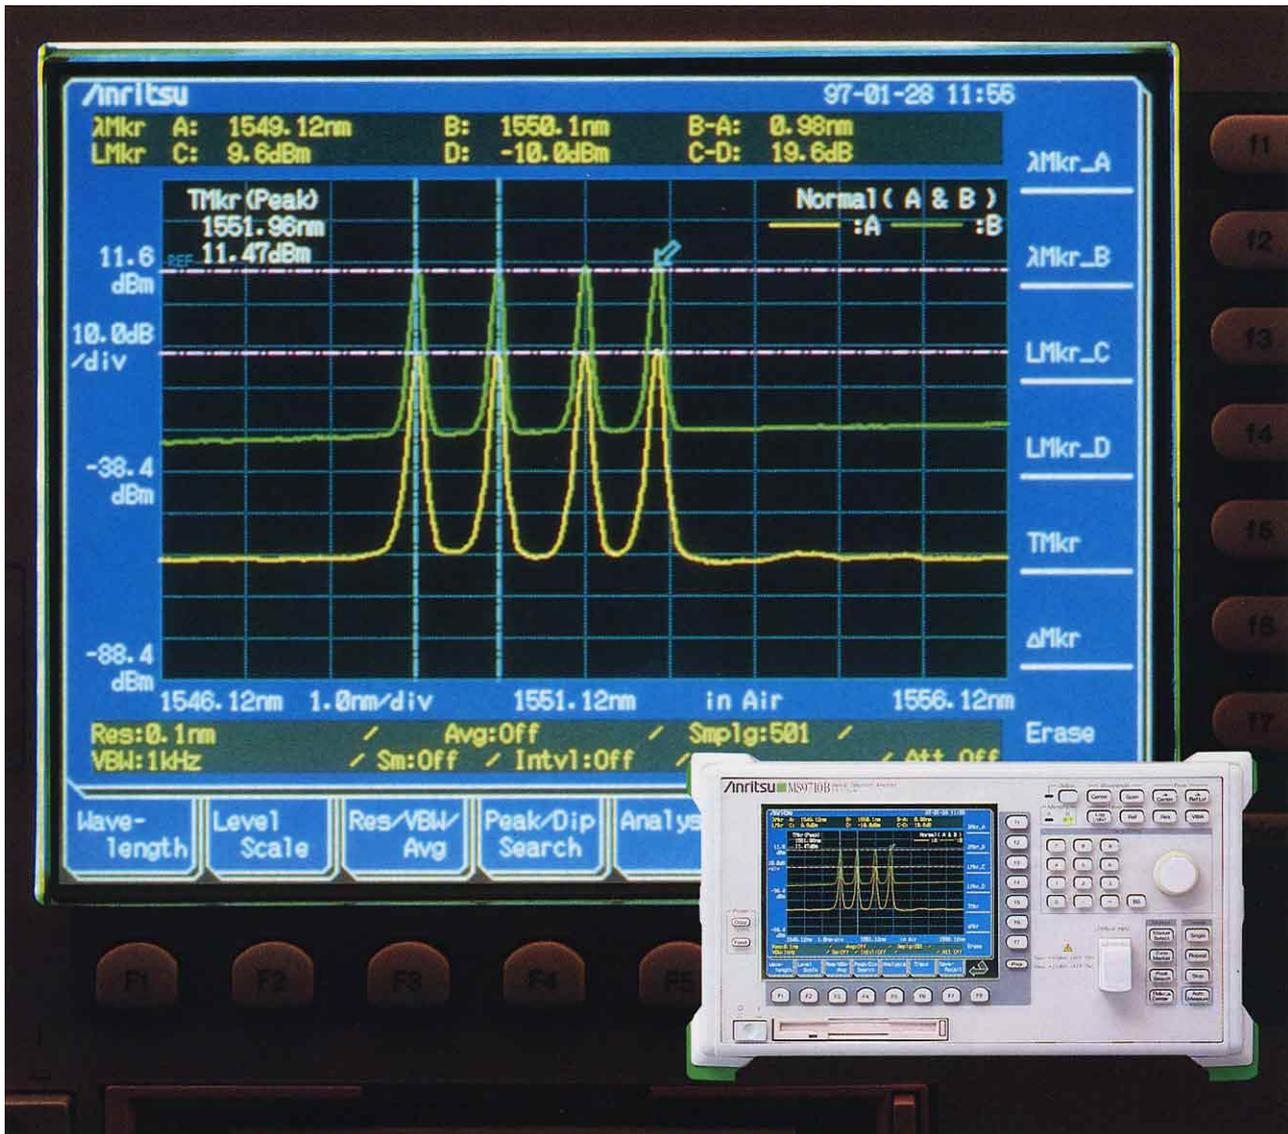

High-Performance, Portable Optical Spectrum Analyzer

Compact High Performance

- 70 dB dynamic range
- -90 dBm guaranteed optical reception sensitivity
- Internal 3.5" FDD (Windows®)
- Tracking with tunable laser source
- Optical pulse measurement
- Full range of WDM application functions

The MS9710B is a diffraction-grating spectrum analyzer for analyzing optical spectra in the 0.6 to 1.75 μm wavelength band. In addition to uses such as measurement of LD and LED spectra, it has functions for measuring the transmission characteristics of passive elements such as optical isolators, as well as the NF/Gain of optical fiber systems.

In addition to its basic features, the superior stability and reliability of the diffraction grating (patent pending) easily pass the severe specifications required for precise measurement of WDM communications methods, particularly in the 1.55 μm band. This analyzer has the dynamic range, reception sensitivity and sweep speed requested by users, backed by Anritsu's high-level technology. The high sensitivity meets the exacting demands placed on today's measuring instruments. In particular, the excellent wavelength and level specifications fully meet the dense WDM requirements in the 1.55 μm band.



In addition to having a much wider dynamic range, its compact portability (approx. 50% lighter) eliminates the large cumbersome image of earlier analyzers by perfectly combining portability with high performance. In addition to the high reliability and excellent basic performance, this analyzer has a full range of application functions to support accurate measurement in the fastest possible time.

70 dB dynamic range

The measurement dynamic range of the MS9710B in the normal measurement mode at a wavelength 1 nm from the peak wavelength is 62 dB. In the high-dynamic-range measurement mode, better than 70 dB can be achieved. The analyzer demonstrates its excellence in SMSR measurement of DFB-LDs, as well as in evaluation of narrow-band optical band pass filters.


Measurement mode	Dynamic range	
	1 nm from peak	0.5 nm from peak
High dynamic range	70 dB	60 dB
Normal	62 dB	58 dB

High-dynamic-range measurement example with DFB-LD spectrum passed via narrow-band BPF.

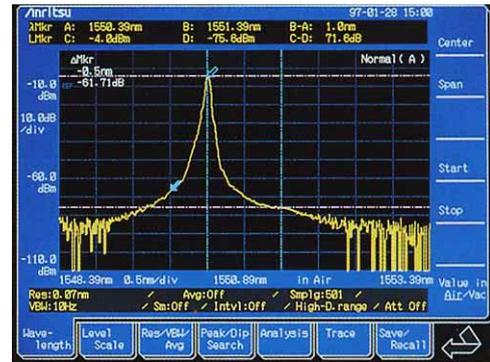


-90 dBm guaranteed optical reception sensitivity

The MS9710B has achieved an improved S/N over a wide range by taking thorough countermeasures to noise and stray light. The RMS noise level at wavelengths from 1.25 to 1.6 μm is -90 dBm max. The screen display below is the waveform obtained when measuring a 1.55 μm DFB-LD optical source of -85 dBm; only 25 seconds are required for the measurement.

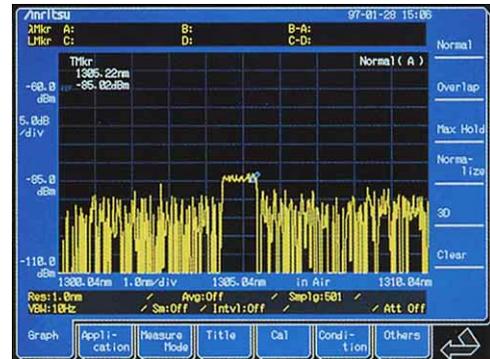


In addition, the S/N can be improved using sweep averaging. The screen display below shows the waveform after 10 averagings; the S/N is improved by more than 5 dB.

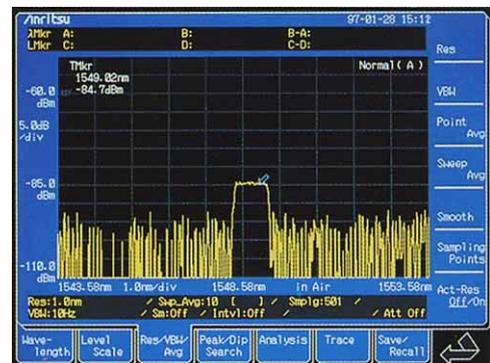

Full function lineup

In addition to its excellent basic functions, the MS9710B comes with a full lineup of other useful functions summarized in the following table.

Device analysis	For analyzing and evaluating waveforms of optical elements (DFB-LDs, FP-LDs, LEDs)
Waveform analysis	For waveform analysis by RMS and threshold methods; SMSR, half-width evaluation, WDM waveform analysis
Application measurement	EDFA NF and gain measurement, PMD measurement (See applications.)
Modulation, pulsed light measurement	Max. frequency range (VBW) = 1 MHz (See applications.)
Markers	Multimarkers: Marker function for max. 128 points (See applications.) Zone markers: For waveform analysis in zone Peak/dip search: Search for a peak or dip
Power monitor	Also functions as optical power meter
Vacuum wavelength display	Converts displayed wavelength to value in vacuum
External interfaces	GPIB, RS-232C

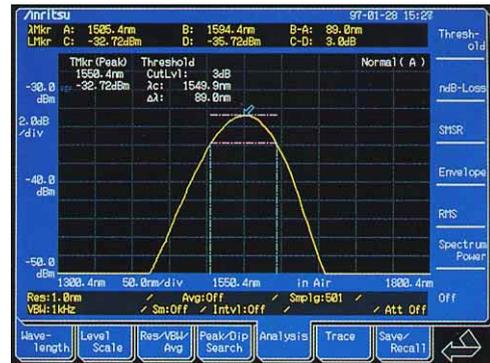

Half-width measurement by threshold method

Relying on 1.55 μm transmission band


As a result of the need for increased transmission capacity, R&D into large-capacity transmission techniques is becoming more active and Wavelength Multiplexing (WDM) is at the stage of actual usage. This WDM transmission technology requires quantitative measurement of the wavelength transmission characteristics between each channel.

Measuring instruments for this purpose require much more accurate wavelength and level measurement. Furthermore, accurate measurement of fiber-amplifier NF requires extremely good polarized light dependency and level linearity specifications.


The MS9710B design has achieved excellent wavelength and level specifications for this purpose in the 1.53 to 1.57 μm wavelength band. In particular, the wavelength accuracy can be calibrated automatically using an optional internal reference wavelength light source; the post-calibration accuracy is better than ± 0.05 nm. Evaluation of WDM systems requires measurement without repeated calibration at each measurement and the MS9710B achieves high-accuracy measurement with high repeatability.

1.53 to 1.57 μm specifications

Wavelength accuracy	± 0.05 nm (after calibration with optional light source)
Wavelength linearity	± 0.02 nm
Wavelength resolution	< 0.07 nm +10%
Wavelength flatness	± 0.1 dB
Polarized light dependency	± 0.05 dB
Level linearity	± 0.05 dB (0 to -50 dBm)

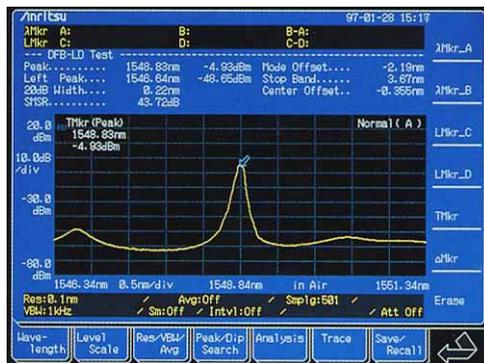


DFB-LD waveform analysis

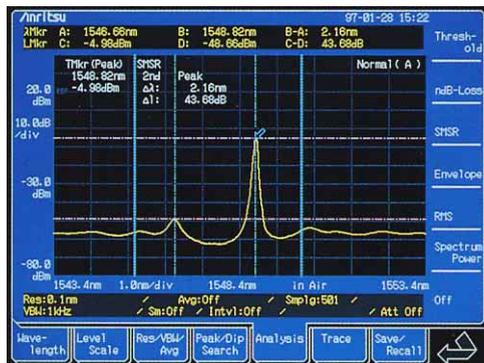

Waveform analysis in zone marker

● Easy-to-read color TFT-LCD

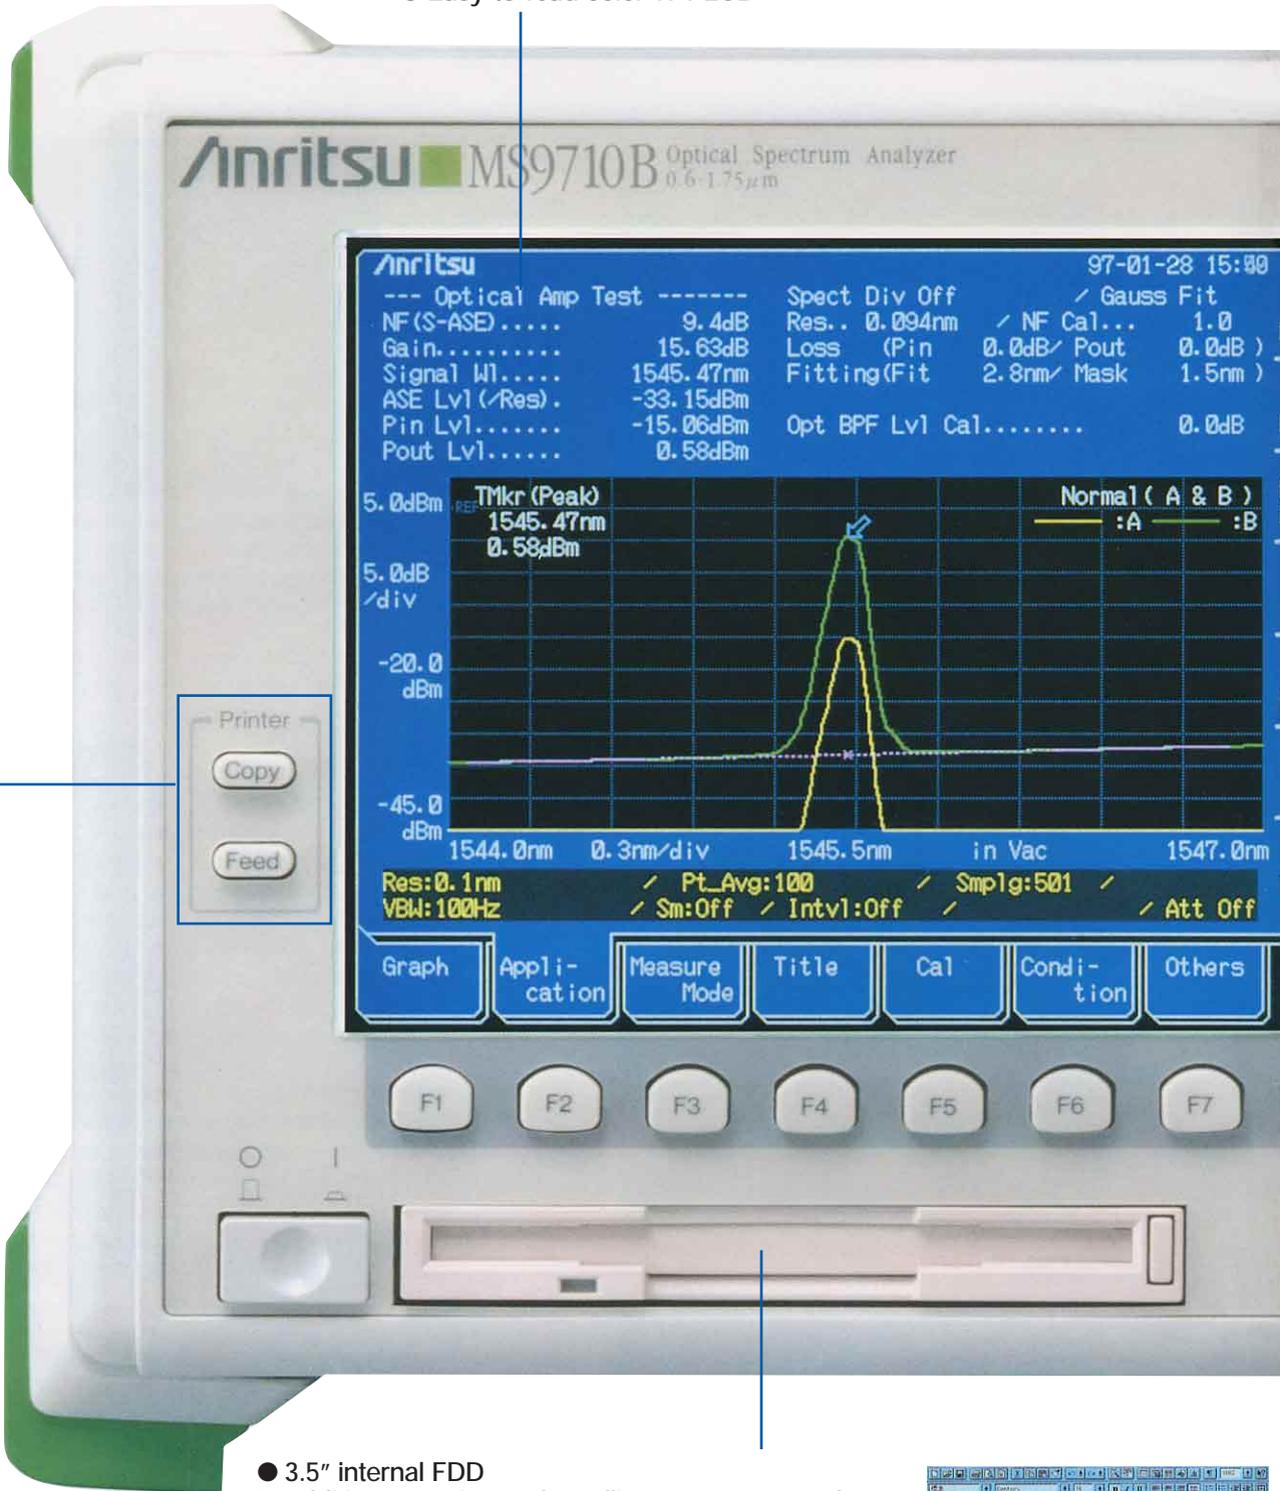


● Thermal printer built in

The MS9710B screen display can be hard-copied at high speed with the internal printer, as well as output to an external printer via the GPIB.

● 3.5" internal FDD

In addition to saving and recalling measurement data, etc., waveforms saved to floppy disk can be easily and directly read by a personal computer.

The PC screen shown on the right is displaying an image of the MS9710B screen saved to floppy disk. Screen images can be saved to FD media and output as Windows® bitmap-format files. In addition, since the data can be output in text-file format, it can be manipulated easily using spreadsheet software.




*Pictures actual size



● Basic measurement direct keys
Frequently-used high function keys can be set directly at these hard keys. Even a novice can perform basic measurements easily using these keys.

● Cleanable optical input connector
Seven connector types can be used: FC/PC, DIN, ST, SC, HMS-10/A, E2000, EC Radial (optical return loss of 35 dB min.). The input connector can be removed and refitted easily for fast cleaning.




Option is installed.

Applications for Every Need

Spectrum analysis for WDM communication system


Difficult problems in WDM transmission technology are the wavelength characteristics for the gain, and signal-to-noise ratio (SNR) between each channel. In evaluation, it is very important to measure this quantitatively. The MS9710B permits extremely quick and simple waveform analysis of up to 300 spectra. The waveform and level (SNR) of each peak exceeding the set threshold is displayed. The screen display below shows an example of the gain tilt.

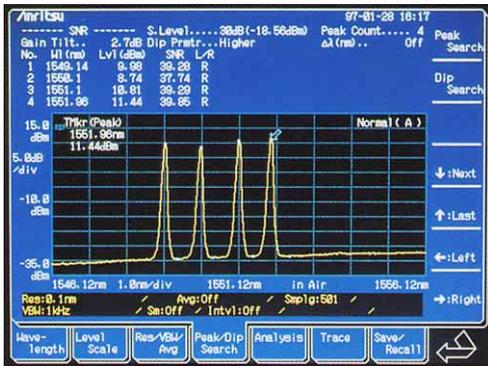

Polarization mode dispersion

An important factor determining the upper limit of the transmission bit rate is the polarization mode dispersion (PMD). PMD is measured in the time and wavelength domains. The MS9710B can be used as a fixed analyzer to perform simple and automated measurement in the wavelength domain and immediately computes the PMD by data processing from the measured waveform. The wavelength difference ($\lambda_2 - \lambda_1$) between the peak wavelength (λ_1) and the wavelength at the Nth peak (λ_2) are read directly and the PMD is calculated from the following equation.

$$PMD = K \frac{N-1}{C} \times \frac{\lambda_1 \cdot \lambda_2}{\Delta\lambda} \quad \text{where: } K \text{ is the mode coupling factor and } C \text{ is the speed of light (m/s).}$$

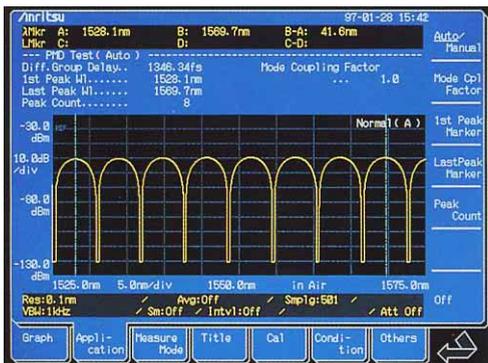


NF measurement of fiber amplifier (EDFA)

NF measurement by the optical method using an optical spectrum analyzer measures the light input and output to and from the EDFA. NF is determined by the beat noise between the optical signal and the Amplified Spontaneous Emission (ASE) as well as by the beat noise between the ASE.


Since the MS9710B measures the ASE level with very high accuracy, three methods can be used to measure NF: 1. Pulse measurement (JIS Method: Under discussing), 2. Level calibration using fitting, and 3. Polarized light nulling*. Moreover, measurement can be performed with the required dynamic range, level linearity and polarization dependency.

* This analyzer is available as the ME7890A Optical Amplifier Test System (uses a pulse method) in combination with the MF9619B Optical Modulator and a personal computer, as the best system for measuring WDM signals with the smallest possible error.

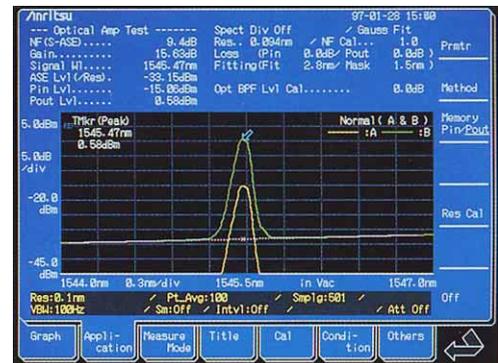

Built-in attenuator for high-power optical sources


When the built-in attenuator is added, optical inputs of up to +20 dBm can be measured. And since the attenuation is automatically corrected internally, there is no need for the user to calibrate the measurement. The screen display below shows the measurement of a +20 dBm optical spectrum amplified by an EDFA.

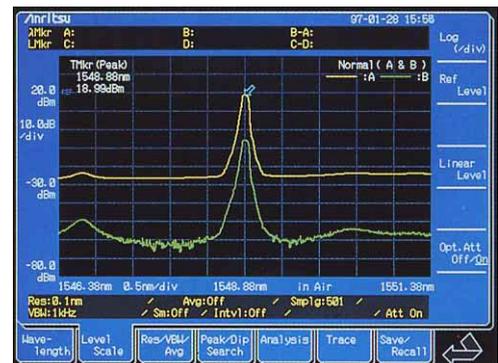

**Convenient light source option
(refer wavelength light for better accuracy)**

Any one of the SLD light source & reference wavelength light source (Option 13), SLD light source (Option 14), reference wavelength light source (Option 05), and white light source (Option 02) can be installed in the MS9710B.

The block diagram of the SLD light source & reference wavelength light source option is shown below. This option has two separate output ports: Port 1 for wavelength calibration, and Port 2 for measuring transmission characteristics. When the MS9710B is calibrated automatically by inputting the reference light for the wavelength, post-calibration wavelength accuracy in the 1.52 to 1.57 μm range is better than $\pm 0.05 \text{ nm}$. This is very useful in precision absolute measurement of the wavelengths of light sources used in WDM systems.

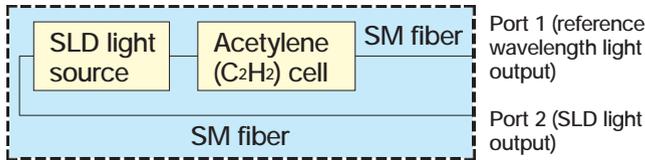


Block diagram of SLD light source & reference wavelength light

The following diagram shows the spectrum of the SLD light output from Port 2. When this light source is used instead of the earlier white light source for measurement of the wavelength transmission characteristics of optical receiver elements, it is possible to achieve a 20 dB wider dynamic range.




Spectrum of SLD light source

The following figure shows an example of measuring the transmission characteristics of optical band pass filter using the SLD light.

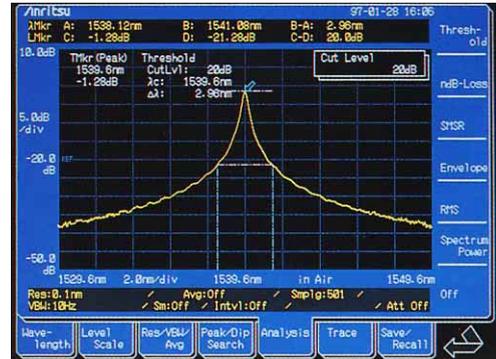

Measurement of optical band pass filter

If this dynamic range is not required, a lower-cost white light source can be installed instead. The following figure shows the spectrum of the white light source using SM fiber (for GI fiber, refer to the specifications of Option 02).

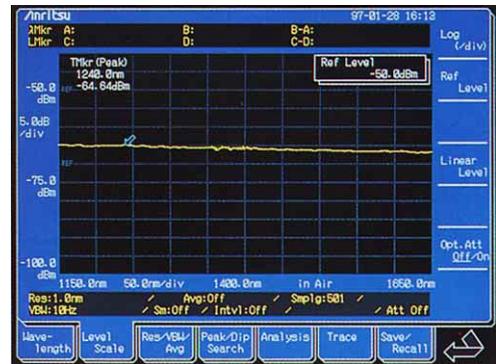

Spectrum of white light source


Note: The optical input section of the MS9710B is designed for connecting single-mode fibers. There is the MS9780A Optical Spectrum Analyzer which have the optical input section designed for connecting multi-mode fibers (50/62.5 μm).

Measurement of modulated and pulsed light

The synchronization signal for the measured modulated/pulsed light is input to the external input trigger on the rear panel. With this analyzer, the data can be held by this sync signal. As a result, the spectrum of the modulated or pulsed light can be measured accurately without data loss.


In addition, an optical source that does not have a sync signal can be measured in the same manner by setting an appropriate gate time. The waveform in the diagram below shows measurement of an optical pulse (OTDR's light source) with a pulse width of 1 μ s and a duty of 1%.

However, for accurate spectrum measurement, the VBW must be set to a wider bandwidth than the modulation frequency of the measured light. The maximum settable VBW in the MS9710B is 1 MHz. (Refer to the specifications page for the relationship between VBW, received light sensitivity and sweep time.)

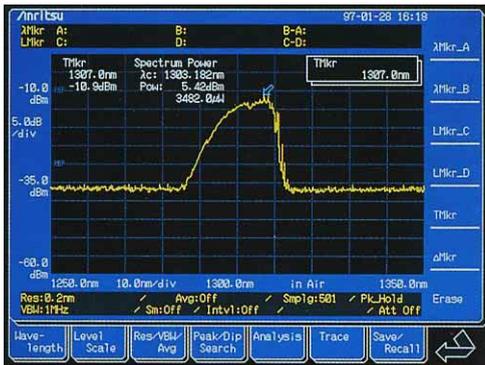


Tracking with tunable laser source

This function eliminates the need for an external controller. As shown below, by connecting the TLS of MG9541A and the MS9710B with an RS-232C cable, tracking operation is achieved. This setup is very convenient for measuring the wavelength transmission characteristics of wide dynamic range optical elements.

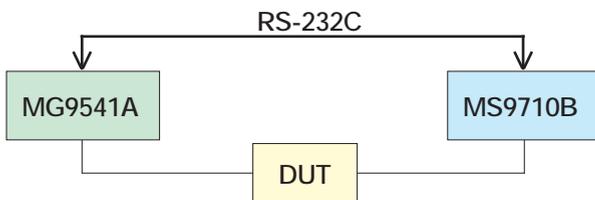


Tracking MG9541A and MS9710B

Measurement is performed using the MS9710B soft keys; the analyzer's marker, trace and smoothing functions permit easy analysis of measurement results, including transmission loss, full width half maximum (FWHM) stop-band loss characteristics. Screens A and B below show measurement examples for a dielectric filter with a center wavelength of 1540 nm. Screen A shows the FWHM measurement; since the wavelength repeatability is better than ± 7 pm, the FWHM can be measured with very high accuracy. Screen B shows a pass band and stop band loss characteristics. Measurement is possible at a wide dynamic range of better than 70 dB when the MS9710B resolution bandwidth is set 0.2 nm.

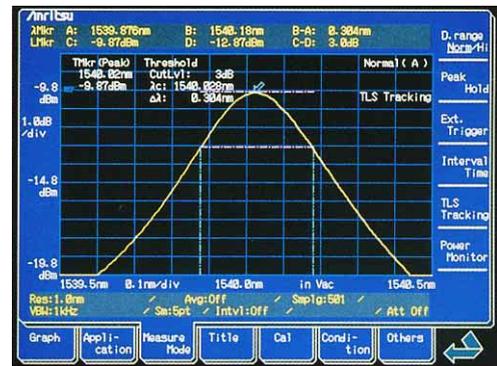

Screen A: FWHM measurement example

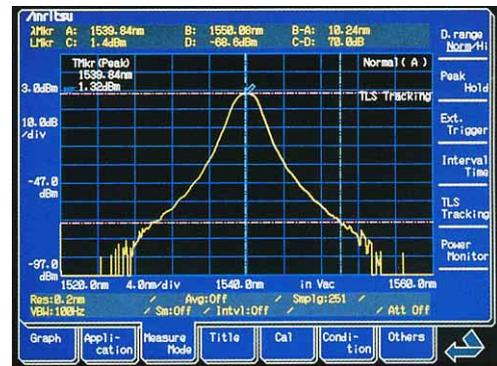

Screen B: Wide dynamic range measurement example

Specifications

◆ MS9710B

Fiber	10/125 μm SM fiber (ITU-T G. 652)
Optical connector*1	User replaceable: FC, SC, ST, DIN, HMS-10A Factory option (not user replaceable): E2000 (Diamond), EC (Radial), FC-APC, SC-APC, HRL-10
Wavelength	Range: 600 to 1750 nm Accuracy: ± 0.2 nm (1530 to 1570 nm, after wavelength calibration) ± 0.3 nm (600 to 1750 nm, after wavelength calibration) ± 0.05 nm (1530 to 1570 nm, resolution: 0.07 to 0.2 nm, after calibration with wavelength reference light source option) ± 0.1 nm (1530 to 1570 nm, resolution: 0.5 to 1 nm, after calibration with wavelength reference light source option) Stability: ± 5 pm (smoothing: 11 points, 1 minute, at half-width center wavelength) Linearity: ± 20 pm (1530 to 1570 nm) Read resolution: 5 pm (display resolution: 1 pm) Setting resolution: 0.07, 0.1, 0.2, 0.5, 1 nm (filter: 3 dB bandwidth) Resolution accuracy*2: $\pm \leq 2.2\%$ (resolution: 0.5 nm, 1550 ± 20 nm), $\pm \leq 7\%$ (resolution: 0.5 nm, at other wavelength) $\pm \leq 3\%$ (resolution: 0.2 nm, 1550 ± 20 nm), $\pm \leq 15\%$ (resolution: 0.2 nm, at other wavelength) $\pm \leq 7\%$ (resolution: 0.1 nm, 1550 ± 20 nm), $\pm \leq 30\%$ (resolution: 0.1 nm, at other wavelength)
Level	Measurement range: -65 to +10 dBm (600 to 1000 nm, 0° to +30°C, VBW: 10 Hz, sweep averaging: 10 times) -85 to +10 dBm (1000 to 1250 nm, 0° to +30°C, VBW: 10 Hz, sweep averaging: 10 times) -90 to +10 dBm (1250 to 1600 nm, 0° to +30°C, VBW: 10 Hz, sweep averaging: 10 times) -75 to +10 dBm (1600 to 1700 nm, 0° to +30°C, VBW: 10 Hz, sweep averaging: 10 times) -55 to +10 dBm (1700 to 1750 nm, 0° to +30°C, VBW: 10 Hz, sweep averaging: 10 times) -65 to +20 dBm (1100 to 1600 nm, attenuator: on) Accuracy: ± 0.4 dB (1550 nm, -23 dBm, resolution: ≥ 0.1 nm) Stability: ± 0.02 dB (1300/1550 nm, -23 dBm, resolution: ≥ 0.1 nm, 1 minute, constant temperature, no polarization shift) Linearity: ± 0.05 dB (1550 nm, 0 to -50 dBm) Flatness: ± 0.1 dB (1530 to 1570 nm)
Polarization dependency	± 0.05 dB (1.55 μm band, resolution: ≥ 0.5 nm), ± 0.1 dB (1.3 μm band, resolution: ≥ 0.5 nm)
Dynamic range	70 dB (± 1 nm, resolution: 0.07 nm, 1.55 μm band, high-dynamic range mode measurement, 20° to 30°C) 60 dB (± 0.5 nm, resolution: 0.07 nm, 1.55 μm band, high-dynamic range mode measurement, 20° to 30°C) 62 dB (± 1 nm, resolution: 0.07 nm, 1.55 μm band, normal mode measurement) 58 dB (± 0.5 nm, resolution: 0.07 nm, 1.55 μm band, normal mode measurement)
Optical return loss	≥ 35 dB (1.3/1.55 μm band)
Sweep	Sweep width: 0, 0.2 to 1,200 nm Sweep speed*3 (typical): 0.5 s (sweep width: 500 nm, normal mode measurement, VBW: 10 kHz)
Display	6.4" color TFT-LCD
Memory	A, B (2 trace), 3.5" FDD (for Windows®)
Printer	Internal (thermal type)
Interface	GPIB, RS-232C
Main functions	Optical pulse measurement, power monitor, wavelength auto-calibration
Operating conditions	Operating temperature: 0° to +50°C (FDD: 5° to 50°C), storage temperature: -20° to +60°C, Relative humidity: $\leq 90\%$ (no condensation)
Power	85 to 132 Vac/170 to 250 Vac, 47.5 to 63 Hz, 150 VA (max.)
Dimensions and mass	177 (H) x 320 (W) x 350 (D) mm, ≤ 16.5 kg
EMC	EN61326: 1997/A1: 1998 (Class A), EN61000-3-2: 1995/A2: 1998 (Class A), EN61326: 1997/A1: 1998 (Annex A)
LVD	EN61010-1: 1993/A2: 1995 (Installation Category II, Pollution degree 2)

*1: One of these connectors is attached. Please specify when ordering.

*2: Actual screen resolution

*3: Typical value for reference; not guaranteed specification

◆ **White light source (Option 02)**

Optical output	≥-59 dBm/1 nm (multimode/fiber input)*1
Wavelength range	900 to 1600 nm
Operating temperature	18° to 28°C

◆ **Wavelength reference & SLD light source (Option 13)**

Wavelength range	1450 to 1650 nm
Output level	>-40 dBm/nm (1550 nm ±10 nm) >-60 dBm/nm (1450 to 1650 nm)
Output level stability*2	±0.04 dB (MS9710B setting resolution: 1 nm, no polarization change, constant temperature, measured for 20 min at 1550 nm)
Spectrum half width	>70 nm (typical: 90 nm)
Optical connector	User replaceable type (FC, SC, ST, DIN, HMS-10/A)
Operating temperature	0° to 40°C
Wavelength reference	1530 nm band Acetylene

◆ **SLD light source (Option 14)**

Wavelength range	1450 to 1650 nm
Output level	>-40 dBm/nm (1550 nm ±10 nm) >-60 dBm/nm (1450 to 1650 nm)
Output level stability*2	±0.04 dB (MS9710B setting resolution: 1 nm, no polarization change, constant temperature, measured for 20 min at 1550 nm)
Spectrum half width	>70 nm (typical: 90 nm)
Optical connector	User replaceable type (FC, SC, ST, DIN, HMS-10/A)
Operating temperature	0° to 40°C

◆ **Reference wavelength light source (Option 05)**

Wavelength reference	1530 nm band Acetylene
----------------------	------------------------

VBW, sweep speed, minimum light reception sensitivity*3

VBW	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz
Sweep speed (typ.)	30 s	5 s	0.5 s	0.5 s	0.5 s	0.5 s
Minimum light reception sensitivity*4	-90 dBm	-80 dBm	-70 dBm	-60 dBm	-50 dBm	-40 dBm

*1: -65 dBm (typ.) measured with MS9710B (at 1 nm wavelength resolution) which has single-mode fiber at the input

*2: Measured after one hour warm-up

*3: Data for reference; not guaranteed specifications (except tracking with MG9541A)

*4: RMS noise level (1.25 to 1.6 μm)

Note: Warm-up to the MS9710B for about 5 minutes to ensure stable operation.
The above specifications were obtained 2 hours after power-on.

Ordering Information

Please specify model/order number, name and quantity when ordering.

Model/Order No.	Name
MS9710B	Main frame Optical Spectrum Analyzer
	Standard accessories
	Optical connector adapter*1: 1 pc
	Power cord, 2.5 m: 1 pc
F0012	Fuse, 3.15 A (for 100/200 Vac system): 2 pcs
Z0312	Printer paper: 2 rolls
W1283AE	MS9710B operation manual: 1 copy
W1284AE	Remote control operation manual: 1 copy
MX971002S	LabVIEW® driver (RS-232C): 1
MX971002G	LabVIEW® driver (GPIB): 1
B0329G	Front cover: 1 pc
	Options
MS9710B-02	White light source*2
MS9710B-05	Reference wavelength light source*2
MS9710B-06	Monitor output (VGA output)
MS9710B-13	Wavelength reference & SLD light source*2
MS9710B-14	SLD light source*2
MS9710B-25	FC-APC connector*3
MS9710B-26	SC-APC connector*3
MS9710B-27	E2000 (Diamond) connector*3
MS9710B-31	EC (Radial) connector*3
MS9710B-37	FC connector*4
MS9710B-38	ST connector*4
MS9710B-39	DIN connector*4
MS9710B-40	SC connector*4
MS9710B-43	HMS-10/A (Diamond) connector*4
MS9710B-47	HRL-10 connector*3
	Application parts
J0654A	RS-232C cable 9P-9P
J0655A	RS-232C cable 9P-25P
J0007	GPIB cable, 1 m
J0617B	Replaceable optical connector (FC)
J0618D	Replaceable optical connector (ST)
J0618E	Replaceable optical connector (DIN)
J0618F	Replaceable optical connector (HMS-10/A)
J0619B	Replaceable optical connector (SC)
J0635B	Optical fiber cord, 2 m
Z0282	Ferrule cleaner
Z0283	Tape for ferrule cleaner
Z0284	Cleaner for optical adapter
B0336C	Hard carrying case
G0084A	Polarization rotation module (for PMD measurement)
B0330C	Tilt stand

*1: Specify the connector to be supplied as the standard connector when ordering the above options. If the connector is not specified, the FC connector (MS9710B-37) is supplied as standard.

*2: Factory option; Two units cannot be installed simultaneously. Exchangeable-type optical connectors (FC, SC, ST, DIN, HMS-10/A) are supplied when specified at ordering. One conversion cord is supplied for connecting other optical connectors to the FC connector.

*3: Factory option

*4: User replaceable

Windows® is a registered trademark of Microsoft Corporation.

LabVIEW® is a registered trademark of National Instruments.



Specifications are subject to change without notice.

**ANRITSU CORPORATION
MEASUREMENT SOLUTIONS**

5-10-27, Minamiazabu, Minato-ku, Tokyo 106-8570, Japan
Phone: +81-3-3446-1111
Telex: J34372
Fax: +81-3-3442-0235

● **U.S.A.**

ANRITSU COMPANY

North American Region Headquarters

1155 East Collins Blvd., Richardson, Tx 75081, U.S.A.
Toll Free: 1-800-ANRITSU (267-4878)
Phone: +1-972-644-1777
Fax: +1-972-671-1877

● **Canada**

ANRITSU ELECTRONICS LTD.

Unit 102, 215 Stafford Road West
Nepean, Ontario K2H 9C1, Canada
Phone: +1-613-828-4090
Fax: +1-613-828-5400

● **Brasil**

ANRITSU ELETRÔNICA LTDA.

Praia de Botafogo 440, Sala 2401 CEP 22250-040,
Rio de Janeiro, RJ, Brasil
Phone: +55-21-5276922
Fax: +55-21-537-1456

● **U.K.**

ANRITSU LTD.

200 Capability Green, Luton, Bedfordshire LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

● **Germany**

ANRITSU GmbH

Grafenberger Allee 54-56, 40237 Düsseldorf, Germany
Phone: +49-211-96855-0
Fax: +49-211-96855-55

● **France**

ANRITSU S.A.

9, Avenue du Québec Z.A. de Courtabœuf 91951 Les
Ulis Cedex, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

● **Italy**

ANRITSU S.p.A.

Via Elio Vittorini, 129, 00144 Roma EUR, Italy
Phone: +39-06-509-9711
Fax: +39-06-502-24-25

● **Sweden**

ANRITSU AB

Botvid Center, Fittija Backe 1-3 145 84 Stockholm,
Sweden
Phone: +46-853470700
Fax: +46-853470730

● **Spain**

ANRITSU ELECTRÓNICA, S.A.

Europa Empresarial Edificio Londres, Planta 1, Oficina
6 C/ Playa de Lienres, 2 28230 Las Rozas. Madrid,
Spain
Phone: +34-91-6404460
Fax: +34-91-6404461

● **Singapore**

ANRITSU PTE LTD.

10, Hoe Chiang Road #07-01/02, Keppel Towers,
Singapore 089315
Phone: +65-282-2400
Fax: +65-282-2533

● **Hong Kong**

ANRITSU COMPANY LTD.

Suite 719, 7/F., Chinachem Golden Plaza, 77 Mody
Road, Tsimshatsui East, Kowloon, Hong Kong, China
Phone: +852-2301-4980
Fax: +852-2301-3545

● **Korea**

ANRITSU CORPORATION

14F Hyun Juk Bldg. 832-41, Yeoksam-dong,
Kangnam-ku, Seoul, Korea
Phone: +82-2-553-6603
Fax: +82-2-553-6604-5

● **Australia**

ANRITSU PTY LTD.

Unit 3/170 Forster Road Mt. Waverley, Victoria, 3149,
Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

● **Taiwan**

ANRITSU COMPANY INC.

6F, 96, Sec. 3, Chien Kou North Rd. Taipei, Taiwan
Phone: +886-2-2515-6050
Fax: +886-2-2509-5519