


Digital Voltmeters

8920A, 8921A & 8922A

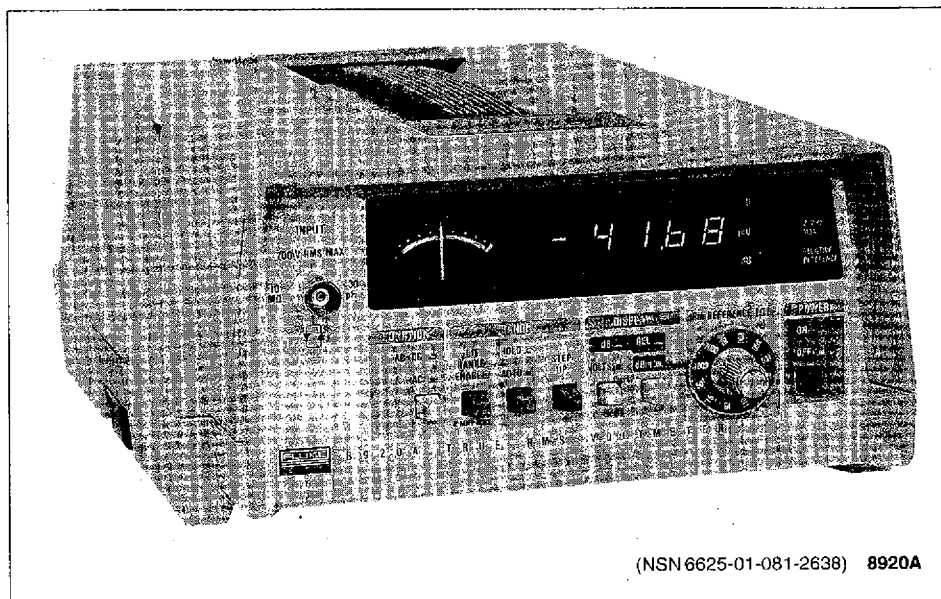

(NSN 6625-01-081-2638) 8920A

8920A, 8921A & 8922A Wideband Digital Voltmeters

True-rms ac with read-out in volts or dB

AC or ac + dc measurements

Autoranging

Selectable dBm reference impedance

Analog display for peak/null adjustments

Rear panel linear analog output (Models 8920A & 8922A)

Relative dB measurements

10 Hz to 20 MHz or 2 Hz to 11 MHz (Model 8922A)

180 μ V to 700V

Choice of Bandwidth

Bandwidth capabilities of the 8920 Series Voltmeters encompass many applications, from testing high-frequency oscillators, attenuator flatness and amplifier frequency response to microphone levels, phono-pickup devices, vibration tests and wideband noise levels to list only a few. Models 8920A and 8921A cover a bandwidth of 10 Hz to 20 MHz. The 8922A offers low-frequency capabilities in the 2 Hz to 11 MHz bandwidth and a switchable 200 kHz low pass filter which eliminates unwanted high-frequency noise from the measured signal.

True-RMS Converter

The heart of all 8920 Series Voltmeters is Fluke's monolithic thermal converter which can measure rms values of an ac signal. This patented semiconductor circuit balances the heating power of a dc feedback signal against the heating power of the ac input voltage, producing a true rms equivalent dc output. This unique converter enables Fluke voltmeters to provide wideband, low-noise, accurate measurements at a low cost.

Selectable dBm Reference Impedance


Fluke's 8920 Series Voltmeters permit an operator to select any one of 12 reference impedances from 50 Ω to 1200 Ω and to digitally read out dB values referenced to the selected level. Input impedance is constant at 10 M Ω for all settings of the dB reference control. This minimizes circuit loading and allows the operator to add the appropriate termination externally. Zero dB corresponds to 1 mW for each of the selectable levels.

AC or AC + DC Functions


The input coupling capabilities of the 8920 Series Voltmeters help solve difficult measurement problems. Without these features, whenever an operator is required to measure a signal which (1) is not symmetrical, (2) has unequal excursions above and below zero, or (3) has a dc component, it is necessary to go through a series of computations to determine the actual rms voltage value. First, the signal has to be measured with a dc voltmeter (providing its ac rejection is sufficient) and then with an ac voltmeter. Finally, the sum of the squares of the two readings must be calculated and the square-root extracted from the result. Failure to consider the dc component by using only an ac-coupled meter can result in substantial error.

Relative dB Measurements

The relative reference feature of the 8920 Series Voltmeters allows direct readings of gain or attenuation. Depressing the REL switch sets the existing dB reading to zero, establishing the input voltage level as the relative dB reference. Subsequent readings of higher voltages will be displayed as +dB, lower voltages as -dB.

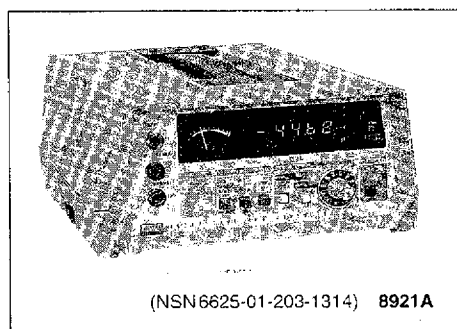

(NSN 6625-01-203-1314) 8921A

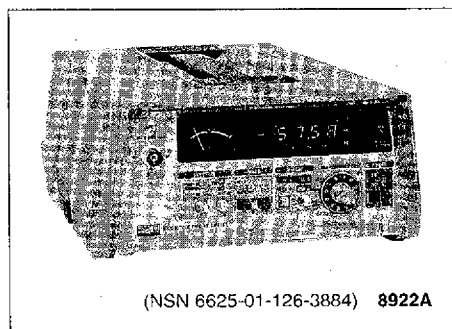

(NSN 6625-01-126-3884) 8922A

Autoranging

Fluke's autoranging feature allows you to carry out your testing without having to change ranges manually. A range can be placed on HOLD or manually stepped up to a higher range. On HOLD, the meter will remain in a given range regardless of changes in input levels. On STEP UP, the meter will increase ranges step-by-step until the switch is released.

Peaking/Dipping Meter

In addition to an accurate digital display, all Fluke voltmeters in the 8920 Series feature an analog meter for peak and null voltage adjustments. The meter indicates 0 to 100 percent full scale in each range.

Linear Analog Output

Models 8920A and 8922A are equipped with a rear panel output for driving X-Y or strip chart recorders, delivering voltages proportional to the display count. A 2-volt level equals 2000 counts, a 1-volt level equals 1000 counts, etc. This feature is not available on Model 8921A.

Accuracy

Fluke digital voltmeters avoid the possibilities for error so common in analog meters. The digital displays eliminate the likelihood of misreading the meter due to viewing angle problems of parallax common with analog meters. Also, the accuracy of 8920 Series Voltmeters is specified as a percent of reading rather than as percent of full scale.

Percent of reading accuracy does not degrade for measurements at the low end of a scale. Front panel switching offers a choice of readings in dB or volts.

Specifications

Technical Specifications

The accuracy specifications below apply from 9% to 100% of full scale and from 18°C to 28°C for 90 days. For six-month specifications multiply figures by 1.5.

AC Accuracy: \pm % of voltage reading or \pm dB (8920A & 8921A)

| Range | 2 Hz | 10 Hz | 20 Hz | 50 Hz | 10 kHz | 200 kHz | 1 MHz | 2 MHz | 10 MHz | 20 MHz |
|---------------------|---------------|--------------|----------------|----------------|-----------------|---------------|-------|--------------|--------|--------|
| 700V 200V | Not Specified | | | | | | | | | |
| 20V 2V 200 mV | Not Specified | 5% or 0.5 dB | 1% or 0.15 dB | 0.5% or 0.1 dB | 0.7% or 0.15 dB | 3% or 0.35 dB | | 5% or 0.5 dB | | |
| 20 mV | | | 2% or 0.245 dB | 1% or 0.15 dB | 2% or 0.25 dB | 4% or 0.4 dB | | | | |
| 2 mV | | | 3% or 0.35 dB | 2% or 0.25 dB | 3% or 0.35 dB | | | | | |

AC Accuracy: \pm % of voltage reading or \pm dB (8922A)

| Range | 2 Hz | 10 Hz | 20 Hz | 50 Hz | 10 kHz | 200 kHz | 1 MHz | 2 MHz | 11 MHz |
|--|--------------------|-------------------|-------------------|------------------|-------------------|--------------------|------------------|-----------------|--------|
| <div style="display: flex; justify-content: space-between;"> <div> FILTER IN </div> <div> FILTER OUT </div> </div> | | | | | | | | | |
| 700V 200V | | | 1% or* 0.15 dB | 1% or 0.15 dB | 0.5% or 0.1 dB | 0.7% or 0.15 dB | Not Specified | | |
| 20V 2V 200 mV | 3% or* 0.35 dB | 5% or 0.5 dB | | | | | 3% or 0.35 dB | | |
| 20 mV | 5% or 0.5 dB | 2% or* 0.25 dB | 2% or 0.25 dB | | 1% or 0.15 dB | 2% or 0.25 dB | | 5% or 0.5 dB | |
| 2 mV | 5% or* 0.5 dB** | 5% or 0.5 dB | 3% or 0.35 dB | 2% or 0.25 dB | | 4% or 0.4 dB | | | |

*Valid when AC + DC DAMPING is selected and input has no dc components

**Below 2 mV add number of digits (N) to $\pm 5\%$ voltage readings, where $N = 5 + \text{mV input}$. Or, for dB readings, add N to ± 0.5 dB, where $N = 0.5 + (\text{mV input})^2$.

AC+DC Accuracy: Add to ac accuracy specifications (above) ± 10 digits or ± 0.5 dB above 2 mV, or ± 100 digits or ± 5.0 dB below 2 mV. For dc only, add above digits to 50 Hz to 10 kHz specifications.

Functions: True-rms measurements only. AC or ac + dc (8920A and 8921A); ac or ac + dc with damping (8922A)

Maximum Input: 700V rms or 1000V peak, not to exceed a volt-hertz product of 1×10^9 on any range

Maximum Common Mode Voltage: 400 mV rms or 600 mV peak (8920A & 8922A); 500V rms or 700V peak (8921A)

AC Common Mode Rejection: ≥ 60 dB at 50 and 60 Hz with 100 Ω unbalance

DC Common Mode Rejection: ≥ 100 dB, 100 Ω unbalance

Crest Factor: 7 at full scale, increasing down scale by 7 times the voltage range divided by the voltage input. Degrades below 10 Hz, annunciated when capability exceeded (8922A only).

Input Impedance: 10 M Ω shunted by <30 pF

Voltage Ranges: 2 mV, 20 mV, 200 mV, 2V, 20V, 200V, 700V

Ranging: Autoranging with HOLD to defeat auto ranging and STEP UP for manual ranging. Ranges

up at 2000 counts and ranges down at 180 counts.

Decibel Ranges: In the autorange mode, the instrument appears as though it has a single range spanning 131 dB

dBm Reference: Twelve user-selectable impedances are provided to reference a 0 dBm, 1 mW level (50 Ω , 75 Ω , 93 Ω , 110 Ω , 124 Ω , 135 Ω , 150 Ω , 300 Ω , 600 Ω , 900 Ω , 1000 Ω , and 1200 Ω) (dBV = 1000 Ω)

Relative dB Reference: A voltage input present when this button is pushed is held as "0 dB" reference point. Subsequent readings indicate \pm deviations from this point.

Voltage Resolution: 0.05% of ranges (3 1/2 digits)

Decibel Resolution: 0.01 dB (4 digits)

Typical -3 dB Points: 40 MHz on 20 mV thru 20V ranges and 4 MHz on 2 mV range (8920A/8921A); 22 MHz on 2 mV to 20V ranges (8922A)

Low Pass Filter: Approximately 200 kHz -3 dB point (8922A)

Reading Rate: 2.5/s or 1/s with ac + dc with damping (8922A)

Autorange Rate: <950 ms or <3.5 s with ac + dc with damping (8922A)

Response Time: (To rated accuracy) <1.6 s or <7 s with ac + dc with damping (8922A)

Readout: Panel-selectable for volts or dB, automatic decimal point location; analog peaking/dipping meter

LED Annunciators: Indicate "mV," "V," "dB," "REL REF," and "2 MHz MAX" for 2 mV range (8920A and 8921A) and "UNCAL" when crest factor limitation exceeded (8922A)

Overrange: Flashes maximum reading for that range

Underrange: Flashes decimal

Linear Analog Output: (8920A and 8922A only) Linear output of 2000 mV dc for a 2000-count readout; $\pm 1.0\%$ relative to display; essentially 0 Ω output into a ≥ 10 k Ω load; non-isolated, with output common same as input common

Digital Voltmeters

8920A, 8921A & 8922A

Option Specifications

Counter Output Option (-03)

Drives frequency counters. Converts input signal into a 100 mV peak square wave. Greater dynamic range extends the sensitivity of counters to 180 μ V at the low end and 700V at the high end. Impedance is 50 Ω . Used with the 8921A, counter can measure signals elevated to 500V rms.

Logarithmic Analog Output Option (-04)

For 8920A and 8922A only. Provides an analog output voltage proportioned to the logarithm of the input voltage. Plots logarithmically-scaled graphs, dB variations. Zero volts and zero dB on the output correspond with 200 μ V on input. A 13.1V output corresponds to 700V or 131 dB on the input. Therefore, 2V on the output equals 20 dB, 6V equals 60 dB, etc., making it easy to relate voltage to dB. The option provides a low-cost way of using an X-Y recorder to plot graphs as one continuous curve over any part of the 131 dB range.

PTI Interface Option (-521)

To use the 8920 Series DVMs with Fluke's own addressable Portable Test Instrument (PTI) byte-serial data bus. Output to Fluke printers, typically. Supplied with 2-foot ribbon cable Y7203.

1120A Interface Option (-522)

A "personality card" that fits in the Fluke 1120A GPIB/IEEE-488* Translator.

IEEE-488 Interface Option (-529)

The 8920 Series Voltmeters can be made compatible with IEEE Std 488-1978 by using Option -529 in combination with the Fluke Model 1120A Translator. A single 1120A will interface three Fluke instruments to the bus. Option -529 is electrically equivalent to Option -521 plus Option -522. Supports subsets SH1, AH1, T3, TE3.

General Specifications

Temperature: -40°C to +75°C, non-operating

Relative Humidity: <80%

Shock: MIL-T-28800 all classes

Vibration: MIL-T-28800, classes 2, 3 & 4

MTBF: >10,000 hours

Safety: Designed to comply with ANSI C39.5, CSA Bulletin 556B, and FM 3820

Power: 100V, 120V, 220V ac \pm 10% or 240V ac +4%, -10%, selected by internal switches, 50 to 400 Hz, 10W max

Size: 32.6 cm L x 20.3 cm W x 10.5 cm H (12.9 in L x 8.0 in W x 4.3 in H)

Weight: 2.47 kg (5.44 lb)

Ordering Information

Models

8920A DVM w/BNC Input

8921A DVM w/Banana Jack Input

8922A DVM w/BNC Input

Included with Instrument

One-year product warranty, line cord, instruction manual, and Certificate of Calibration Practices.

Options

-003 Counter Output

-004* Logarithmic Output (not for 8921A)

-521 Interface Opt w/PTI Cable

-521K Interface Opt w/PTI Cable, field-installable

-522K 1120A Interface field-installable

-529** IEEE-488 Interface Option w/PTI Cable

*Not compatible with -521, -521K, -529

**The -529 Option can be ordered and installed at time of manufacture only. For existing instruments which do not have -529 Option installed, an IEEE interface can be added by ordering -521K and -522K (1120A required).

Accessories (Also see Section 7)

1120A IEEE-488 Translator

Y7203 Ribbon Cable, PTI 2 ft

Y7204 Ribbon Cable, PTI 5 ft

A90 Current Shunt, 6-Range

80J-10 Current Shunt, 10 Amp

Y9100 BNC 50 Ω Attenuator (6 dB)

Y9101 BNC 50 Ω Attenuator (14 dB)

Y9102 BNC 50 Ω Attenuator (20 dB)

Y9103 50 Ω Feedthrough Terminator

Y9107 BNC "T"

Y9109 Banana to BNC Adapter

Y9112 BNC to BNC Cable, 6 ft

Manuals

8920/21A Instruction*

8922A Instruction*

*No charge with purchase of unit

Customer Support Services

Also see Section 20.

Factory Warranty

One-year product warranty.

*The terms GPIB and IEEE-488 may be used interchangeably throughout this catalog.