

RIGOL



DG5000 series

Function/Arbitrary Waveform Generator

DG5000 is a multifunctional generator that combines many functions in one, including Function Generator, Arbitrary Waveform Generator, Pulse Generator, IQ Baseband Source/IQ IF Source, Frequency Hopping Source (optional) and Pattern Generator (optional). It provides single and dual-channel models. The model is a kind of truly dual-channel signal generator, as the functions of its two channels are equivalent and its phase deviation between the two channels is precisely adjustable.

DG5000, adopting the Direct Digital Synthesizer (DDS) technology, can provide stable, precise, pure and low distortion signal. The user-friendly interface design and panel layout bring users exceptional experience. Besides, the remote control of the generator can be easily done through different standard configuration interfaces, which provides more solutions for users.

RIGOL TECHNOLOGIES CO., LTD.


DG5000 Series Function/Arbitrary Waveform Generator



► Features and Benefits

- 4.3 inches, 16M true color TFT LCD.
- 350 MHz, 250 MHz, or 100 MHz or 70 MHz maximum sine output frequency, 1 GSa/s sample rate, 14 bits resolution.
- Single/dual-channel models. The dual-channel model supports frequency and phase coupling.
- The channels of the dual-channel model are isolated from each other.
- The 16+2 channels digital output module (optional) together with the analog channel can rebuild the more mixed signals in daily practice.
- Support an external power amplifier (optional) that can be configured online.
- Support frequency hopping(optional) with hopping interval up to 80 ns and arbitrary editing frequency hopping patterns.
- 14 standard waveform functions: Sine,Square,Ramp,Pulses,Noise,Sinc,Exponential Rise,Exponential Fall,ECG,Gauss,Haversine,Lorentz,Dual Tones and DC.
- Rise/Fall Time of the Pulse could be adjusted separately.
- Enable to edit arbitrary waveform up to 512 kpts and output arbitrary waveforms up to 128 Mpts.
- Support AM,FM,PM,ASK,FSK,PSK and PWM modulations.
- Support user-defined IQ vector signal modulation and IQ baseband/IF source output.
- Support Frequency Sweep and Burst output.
- Abundant I/O: waveform output, synchronous signal output, modulation input, 10 MHz clock input/output, trigger input/output.
- Enable to store and recall waveform data and instrument state, and support versatile file types.
Standard configuration with 1 GBytes flash memory.
- Plenty of standard interfaces: double USB Hosts, USB Device, LAN, and GPIB (IEEE-488.2).
- Seamlessly interconnected with **RIGOL** USB-TMC digital oscilloscopes for loading and reappearing waveforms.
- Support USB flash device storage for FAT files.
- Support PictBridge printer.
- Provide security lock hole.
- Support remote control through 10/100M Ethernet web.
- Conform to LXI-C instrument standards (Version 1.2).
- Provide Chinese and English built-in help and input methods.
- Provide powerful waveform editing PC software.


Advanced functions

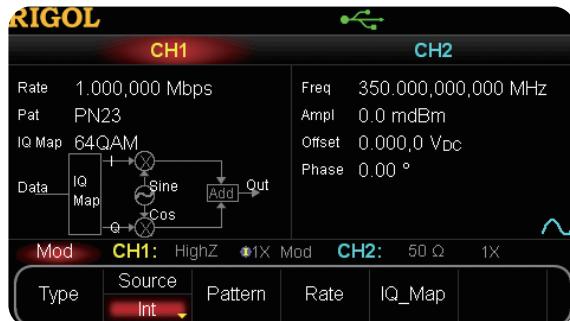

IQ Modulation




Frequency Hopping

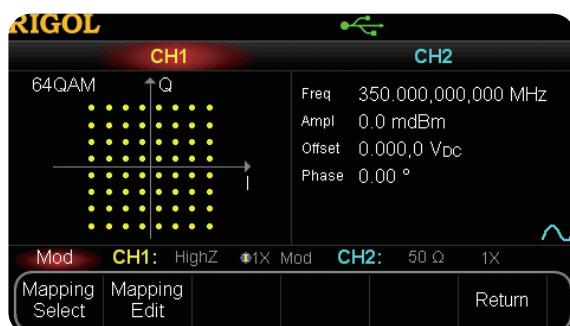

IQ Mapping Selection



IQ Mapping Edit

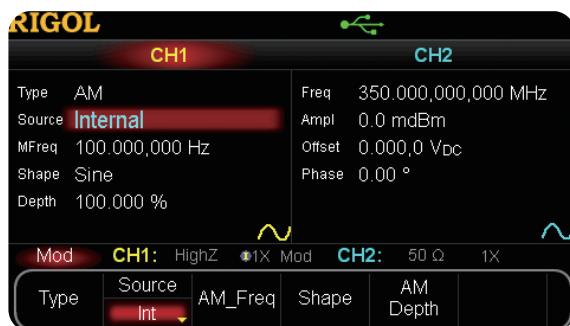

AM



PWM




FSK



Burst



Sweep

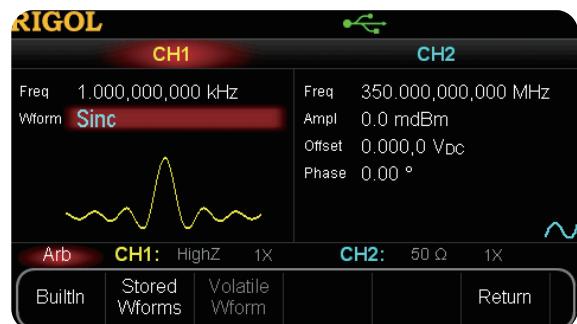

ARB

► Specification

All the specifications can be guaranteed if the following two conditions are met unless where noted.

- The generator is within the calibration and has performed self-calibration.
- The generator has been working continuously for 30 minutes at specified temperature (18°C ~ 28°C).

All the specifications are guaranteed unless those marked with "typical".

Model	DG5352 DG5351	DG5252 DG5251	DG5102 DG5101	DG5072 DG5071
Channel	2/1	2/1	2/1	2/1
Maximum Frequency	350 MHz	250 MHz	100 MHz	70 MHz
Sample Rate		1 GSa/s		
Waveforms	Sine, Square, Ramp, Pulse, Noise			
Standard Waveforms		Sinc, Exponential Rise, Exponential Fall, ECG, Gauss, HaverSine, Lorentz, Dual-Tone, DC		
Arbitrary Waveforms				

Frequency Characteristics				
Sine	1 µHz to 350 MHz	1 µHz to 250 MHz	1 µHz to 100 MHz	1 µHz to 70 MHz
Square	1 µHz to 120 MHz	1 µHz to 120 MHz	1 µHz to 100 MHz	1 µHz to 70 MHz
Ramp	1 µHz to 5 MHz	1 µHz to 5 MHz	1 µHz to 3 MHz	1 µHz to 3 MHz
Pulse	1 µHz to 50 MHz	1 µHz to 50 MHz	1 µHz to 50 MHz	1 µHz to 50 MHz
Noise	250 MHz Bandwidth			
Arb	1 µHz to 50 MHz	1 µHz to 50 MHz	1 µHz to 50 MHz	1 µHz to 50 MHz
Resolution	1 µHz			
Accuracy	±1 ppm, 18 °C to 28 °C			

Sine Wave Spectrum Purity				
Harmonic Distortion	Typical (0 dBm) ≤100MHz: <-40dBc >100MHz: <-35dBc	Typical (0 dBm) ≤100MHz: <-40dBc >100MHz: <-35dBc	Typical (0 dBm) ≤100MHz: <-40dBc	Typical (0 dBm) ≤ 70MHz: <-40dBc
Total Harmonic Distortion	<0.5% (10 Hz to 20 kHz, 0 dBm)			
Spurious (non-harmonic)	Typical (0 dBm) ≤100MHz: <-50dBc >100MHz: -50dBc+6dBc/octave	Typical (0 dBm) ≤100MHz: <-50dBc >100MHz: -50dBc+6dBc/octave	Typical (0 dBm) ≤ 100MHz: <-50dBc	Typical (0 dBm) ≤ 70MHz: <-50dBc
Phase Noise	Typical (0 dBm, 10 kHz deviation)	10 MHz: <-110 dBc		

Signal Characteristics				
Square				
Rise/Fall Time	Typical Value (1Vpp) < 2.5 ns	Typical Value (1Vpp) < 2.5 ns	Typical Value (1Vpp) < 3 ns	Typical Value (1Vpp) <4 ns
Overshoot	Typical Value (1Vpp) < 5%			
Duty Cycle	≤ 10 MHz: 20.0% to 80.0% 10 MHz to 40 MHz: 40.0% to 60.0% > 40 MHz: 50.0% (fixed)			
Non-symmetry	1% of period + 5 ns			
Jitter (rms)	Typical Value (1Vpp) ≤ 30 MHz: 10ppm+500 ps > 30 MHz: 500 ps			

Ramp	
Linearity	$\leq 0.5\%$ of peak output
Symmetry	0% to 100%
Pulse	
Period	20 ns to 1000000 s
Pulse Width	4 ns to 1000000 s
Leading/Trailing Edge Time	2.5 ns to 1 ms 2.5 ns to 1 ms 3 ns to 1 ms 4 ns to 1 ms
Overshoot	<5%
Jitter (rms)	Typical Value (1Vpp) 10 ppm+500 ps

Arb	
Waveform Length	Normal Mode: 2 to 16Mpts Play Mode : 2 to 128Mpts
Vertical Resolution	14 bits
Mode	Normal Mode, Play Mode
Sample Rate	Normal Mode (Waveform Length is from 2 to 16Mpts): 1G Sa/s (fixed) Play Mode (Waveform Length is from 2 to 128Mpts): ≤ 1 G Sa/s (variable)
Minimum Rise/Fall Time	Typical Value (1Vpp) ≤ 3 ns
Jitter (rms)	3 ns
Interpolation Method	Close, Linear, Sinc
Edit Method	Edit Point, Edit Block
Non-Volatile Memory	1G Bytes

Output Characteristics				
Amplitude (into 50 Ω)				
Range	≤ 100 MHz: 5mVpp to 10Vpp ≤ 250 MHz: 5mVpp to 5Vpp ≤ 350 MHz: 5mVpp to 2Vpp	≤ 100 MHz: 5mVpp to 10Vpp ≤ 250 MHz: 5mVpp to 5Vpp	5mVpp to 10Vpp	5mVpp to 10Vpp
Accuracy	Typical (1kHz Sine, 0V Deviation, >10 mVpp, Auto) $\pm 1\%$ of setting ± 1 mVpp			
Amplitude	<10MHz: ± 0.1 dB	<10MHz: ± 0.1 dB	<10MHz: ± 0.1 dB	<10MHz: ± 0.1 dB
Flatness	10MHz to 60MHz: ± 0.2 dB (relative to 100 kHz, 1.25Vpp Sine wave, 50 Ω)	10MHz to 60MHz: ± 0.2 dB 60MHz to 100MHz: ± 0.4 dB	10MHz to 60MHz: ± 0.2 dB 60MHz to 100MHz: ± 0.4 dB	10MHz to 60MHz: ± 0.2 dB 60MHz to 70MHz: ± 0.4 dB
Units	Vpp, Vrms, dBm, High Level, Low Level			
Resolution	0.1 mV or 4 digits			

Offset (into 50 Ω)				
Range	± 5 Vpk ac + dc			
Accuracy	1% of setting + 5mV + 0.5% of amplitude			
Waveform Output				
Impedance	50 Ω (typical)			
Isolation	42 Vpk max. to Earth			
Protection	Over-temperature protected, Short-circuit protected, Overload relay automatically disables main output			

FH Characteristics				
FH Bandwidth	1.5 MHz to 250 MHz			
FH Rate	1 Hop/s to 12.5M Hop/s			
Frequency Point Count	4096			
Sequence Length	4096			

Modulation Characteristics				
Modulation Types	AM, FM, PM, ASK, FSK, PSK, PWM, IQ			

AM	
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveforms	Sine, Square, Ramp, Noise, Arb (2 mHz to 50 kHz)
Depth	0% to 120%
FM	
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveforms	Sine, Square, Ramp, Noise, Arb (2 mHz to 50 kHz)
PM	
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveforms	Sine, Square, Ramp, Noise, Arb (2 mHz to 50 kHz)
Phase Deviation	0° to 360°
ASK	
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveforms	Square with 50% duty cycle (2 mHz to 1 MHz)
FSK	
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveforms	Square with 50% duty cycle (2 mHz to 1 MHz)
PSK	
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveforms	Square with 50% duty cycle (2 mHz to 1 MHz)
PWM	
Carrier Waveform	Pulse
Source	Internal/External
Modulating Waveforms	Sine, Square, Ramp, Noise, Arb (2 mHz to 50 kHz)
Width Deviation	0% to 100% of Pulse Width
IQ	
Carrier Waveform	Sine (max. 200 MHz) Sine (max. 200 MHz) Sine (max. 100 MHz) Sine (max. 70 MHz)
Source	Internal/External
Code Pattern	PN Sequence, 4 bits code pattern, User
IQ Mapping	4QAM, 8QAM, 16QAM, 32QAM, 64QAM, BPSK, QPSK, OQPSK, 8PSK, 16PSK, User
Code Rate	1 bps to 1 M bps
External Modulation Input	
Input Range	±5 Vac
Input Bandwidth	50 kHz
Input Impedance	10 kΩ

Burst Characteristics				
Carrier Waveforms	Sine, Square, Ramp, Pulse, Noise, Arb (except DC)			
Carrier Frequency	1 µHz to 120 MHz	1 µHz to 120	1 µHz to 100 MHz	1 µHz to 70 MHz
Burst Count	1 to 1 000 000 or Infinite			
Start/Stop Phase	0° to 360°			
Internal Period	1 µs to 500 s			
Gated Source	External Trigger			
Trigger Source	Internal, External or Manual			
Trigger Delay	0 ns to 85 s			
Sweep Characteristics				
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)			
Type	Linear, Log or Step			
Direction	Up or Down			
Start/Stop Frequency	1 µHz to 250 MHz	1 µHz to 250 MHz	1 µHz to 100 MHz	1 µHz to 70 MHz
Sweep Time	1 ms to 300 s			
Hold/Return Time	0 ms to 300 s			
Trigger Source	Internal, External or Manual			
Marker	Falling edge of Sync signal (programmable)			
Programming Time				
Configuration Time (typical)				
Function Change	USB2.0	LAN	GPIB	
Frequency Change	500ms	510ms	510ms	
Amplitude Change	50ms	50ms	50ms	
Select User Arb	300ms	310ms	310ms	
Arb Download Time (binary transfer)	500ms	510ms	510ms	
1 Mpts/s				
Note: Download time do not include setup or output time.				
Trigger Characteristics				
Trigger Input				
Level	TTL-compatible			
Slope	Rising or falling (selectable)			
Pulse Width	> 50 ns			
Latency	Sweep: <100 ns (typical) Burst: <300 ns (typical)			
Trigger Output				
Level	TTL-compatible			
Pulse Width	> 60 ns (typical)			
Maximum Rate	1MHz			
Clock Reference				
Phase Offset				
Range	0° to 360°			
Resolution	0.001°(arb waveform), 0.03° (other waveforms)			
External Reference Input				
Lock Range	10 MHz ± 50 Hz			
Level	80 mVpp to 10 Vpp			
Lock Time	< 2 s			
Internal Reference Output				
Frequency	10 MHz ± 50 Hz			
Level	632 mVpp (0 dBm), nominal value			
Sync Output				
Level	TTL-compatible			
Impedance	50 Ω, nominal value			

General Specifications

Power	
Power Voltage	100-127 V, 45-440Hz
	100-240 V, 45-65Hz
Power Consumption	
Fuse	Less than 125 W
Display	250V, T3A
Type	4.3-inch TFT LCD
Resolution	480 Horizontal × RGB × 272 Vertical Resolution
Color	16 M color
Environment	
Temperature Range	Operating: 10 °C to 40 °C Non-Operating: -20 °C to 60 °C
Cooling Method	Cooling by fans compulsively
Humidity Range	Less than 35 °C: ≤90% Relative Humidity (RH) 35 °C to 40 °C: ≤60% Relative Humidity (RH)
Altitude	Operating: Less than 3,000 meters Non-Operating: Less than 15,000 meters
Mechanical	
Dimensions (W×H×D)	230 mm × 106 mm × 501 mm
Weight	with no package: 4.3 kg with package: 5.84 kg
Interfaces	USB Host (2), USB Device, GPIB, LAN
IP Protection	IP2X
Calibration Interval	Recommend 1 year for standard interval

► Order Information

	Description	Order Number
Model	DG5352 (350 MHz, dual-channel)	DG5352
	DG5351 (350 MHz, single-channel)	DG5351
	DG5252 (250 MHz, dual-channel)	DG5252
	DG5251 (250 MHz, single-channel)	DG5251
	DG5102 (100 MHz, dual-channel)	DG5102
	DG5101 (100 MHz, single-channel)	DG5101
	DG5072 (70MHz, dual-channel)	DG5072
	DG5071 (70MHz, single-channel)	DG5071
	Power Cord	-
	USB Cable	CB-USB
Standard Accessories	BNC Cable (1 meter)	CB-BNC-BNC-1
	Warranty Card	-
	SMB(F) to BNC(M) Cable (1 meter)	CB-SMB(F)-BNC(M)-1
	Frequency Hopping Module	DG5-FH
Options	Power Amplifier	PA1011
	SMB(F) to SMB(F) Cable (1 meter)	CB-SMB(F)-SMB(F)-1
	SMB(F) to BNC(F) Cable (1 meter)	CB-SMB(F)-BNC(F)-1
	40 dB Attenuator	ATT-40dB
Optional Accessories		RMK-DG-5

HEADQUARTER

RIGOL TECHNOLOGIES CO., LTD.
No.8 Keling Road, New District,Suzhou,
JiangSu,P.R.China
Tel:+86-400620002
Email:info@rigol.com

EUROPE

RIGOL TECHNOLOGIES EU GmbH
Lindbergh str. 4
82178 Puchheim
Germany
Tel: +49-89/89418950
Email: info-europe@rigol.com

NORTH AMERICA

RIGOL TECHNOLOGIES, USA INC.
8140 SW Nimbus Ave.
Beaverton, OR 97008
Tel: +1-877-4-**RIGOL-1**
Fax: +1-877-4-**RIGOL-1**
Email: info@rigol.com

JAPAN

RIGOL TECHNOLOGIES JAPAN, LLC
MJ Bldg. 3F, 1-7-4 Minato, Chuou-ku,
Tokyo, Japan 104-0043
Tel: +81-3-6262-8932
Fax: +81-3-6262-8933
Email: info-japan@rigol.com

RIGOL® is the trademark of **RIGOL** TECHNOLOGIES CO., LTD. Product information in this document subject to update without notice. For the latest information about **RIGOL**'s products, applications and services, please contact local **RIGOL** channel partners or access **RIGOL** official website: www.rigol.com