

Keysight Technologies

E5100A Network Analyzer

Data Sheet

These specifications are the performance standards or limits against which the instrument is tested. When shipped from the factory, the E5100A meets the specifications listed in this section.

Values followed by (SPC) are supplemental performance characteristics.

Source

Frequency characteristics

Range	10 kHz to 300 MHz
Accuracy (at 23 ±5 °C)	±20 ppm
With Option E5100A-1D5 (at 0 to 55 °C, 20 minutes after power on)	±1 ppm
Stability (at 23 ±5 °C)	±5 x 10 ⁻⁶ /day (SPC)
With Option E5100A-1D5 (48 hours after power on)	±2.5 x 10 ⁻⁹ /8 hours (SPC)
Resolution	1 mHz

Output power characteristics

(measured at RF OUT 1, RF OUT 2 is terminated with 50 Ω termination)

Range (nominal)	
With Option E5100A-001	-9 dBm to +11 dBm
With Option E5100A-002	-15 dBm to +5 dBm
With Option E5100A-003	-12 dBm to +8 dBm
With Option E5100A-801	-48 dBm to +22 dBm
With Option E5100A-802	-54 dBm to +16 dBm
With Option E5100A-803	-51 dBm to +19 dBm
With Option E5100A-600 (at RF OUT 1)	-52 dBm to +18 dBm
With Option E5100A-600 (at RF OUT 2)	-65 dBm to +5 dBm
Resolution	0.1 dB
Level accuracy (at 23 ±5 °C, 0 dBm output level, 50 MHz)	±1 dB
Flatness (at 23 ±5 °C, relative to 0 dBm output level at 50 MHz)	+2 dB, -4 dB
With Option E5100A-803	+2.5 dB, -4.5 dB
With Option E5100A-801 or E5100A-802	
10 kHz ≤ frequency < 50 kHz	+1.5 dB, -6 dB (SPC)
50 kHz ≤ frequency ≤ 100 MHz	+2.5 dB, -4.5 dB
100 MHz < frequency ≤ 300 MHz	+3 dB, -5 dB
With Option E5100A-600	
10 kHz ≤ frequency < 50 kHz	+1.5 dB, -7 dB (SPC)
50 kHz ≤ frequency ≤ 100 MHz	+2.5 dB, -4.5 dB
100 MHz < frequency ≤ 300 MHz	+3 dB, -5 dB
Linearity (at 23 ±5 °C, relative to 0 dBm output level at 50 MHz)	±1 dB
With Option E5100A-801/802/803	
Maximum power level -70 dB ≤ power level	
< maximum power level -60 dB	±1.5 dB
Maximum power level -60 dB ≤ power level	
≤ maximum power level	±1 dB

Power splitter

(When the analyzer is equipped with Option E5100A-001 or E5100A-003, delete this section.)

Insertion loss (When the analyzer is equipped with Option E5100A-600, delete this item.)	6 dB (nominal)
--	----------------

Output tracking

Without Option E5100A-600	
10 kHz ≤ frequency ≤ 100 MHz	0.1 dB (SPC)
100 MHz < frequency ≤ 300 MHz	0.2 dB (SPC)
With Option E5100A-600	
10 kHz ≤ frequency ≤ 100 MHz	13 dB ±0.3 dB (SPC)
100 MHz < frequency ≤ 300 MHz	13 dB ±0.5 dB (SPC)

Equivalent output SWR

Without Option E5100A-600	
10 kHz ≤ frequency < 100 MHz	≤ 1.2 (SPC)
100 MHz ≤ frequency ≤ 300 MHz	≤ 1.4 (SPC)

- With Option E5100A-600
 - 10 kHz ≤ frequency < 50 kHz ≤ 2.5 (SPC)
 - 50 kHz ≤ frequency ≤ 100 MHz ≤ 1.2 (SPC)
 - 100 MHz < frequency ≤ 300 MHz ≤ 1.4 (SPC)

Spectral purity characteristics

- Non-harmonic spurious signals (at < 300 MHz)
 - With Option E5100A-001 (at -4 dBm output level) < -45 dBc
 - With Option E5100A-002 (at -10 dBm output level) < -45 dBc
 - With Option E5100A-003 (at -7 dBm output level) < -45 dBc
 - With Option E5100A-600 (at 0 dBm output level) < -45 dBc
 - With Option E5100A-801 (at +6 dBm output level) < -45 dBc
 - With Option E5100A-802 (at 0 dBm output level) < -45 dBc
 - With Option E5100A-803 (at +3 dBm output level) < -45 dBc
- Phase noise (at 10 kHz offset from 0 dBm fundamental) < -90 dBc/Hz

Other source information

- Reverse power protection 20 dBm, 25 Vdc (SPC)
- Output connector BNC female
- Output impedance 50 Ω (nominal)

Receiver

Input characteristics

- Frequency range 10 kHz to 300 MHz
 - 1 MΩ input for Options E5100A-703/704/707/708 10 kHz to 5 MHz
- IF bandwidth (IF BW) 10 Hz to 30 kHz, 1, 1.5, 2, 3, 4, 5, 8 step (nominal)
- Impedance 50 Ω (nominal)
 - 1 MΩ input for Option E5100A-703/704/707/708 1 MΩ // 30 pF (nominal)
- Return loss (at 50 Ω input)
 - 10 kHz ≤ frequency < 100 MHz 20 dB (SPC)
 - 100 MHz ≤ frequency ≤ 300 MHz 15 dB (SPC)

Maximum input level

50 Ω input

Frequency	RF attenuator	Maximum input level
10 kHz ≤ frequency < 200 kHz	25 dB	0 dBm
10 kHz ≤ frequency < 200 kHz	0 dB	- 25 dBm
200 kHz ≤ frequency ≤ 300 MHz	25 dB	+5 dBm
200 kHz ≤ frequency ≤ 300 MHz	0 dB	- 20 dBm

1 MΩ Input for Options E5100A-705/706/707/708

Frequency ¹	RF attenuator	Maximum input level
10 kHz ≤ frequency < 200	kHz 25 dB	0.22 Vrms
10 kHz ≤ frequency < 200	kHz 0 dB	0.013 Vrms
200 kHz ≤ frequency ≤ 300 MHz	25 dB	0.40 Vrms
200 kHz ≤ frequency ≤ 300 MHz	0 dB	0.022 Vrms

Damage level

- DC 25 Vdc
- AC 20 dBm

1. Measurement frequency ≤ 5 MHz

Averaging noise level (at magnitude measurement, 23 ±5 °C, RF attenuator: 0 dB, 50 Ω input)¹

IF BW 30 kHz (at > 1 MHz).....	-100 dBm
IF BW 10 kHz (at > 300 kHz).....	-105 dBm
IF BW 3 kHz (at > 100 kHz).....	-110 dBm
IF BW 1 kHz	
30 kHz ≤ frequency < 100 kHz.....	-95 dBm
100 kHz ≤ frequency ≤ 300 MHz.....	-115 dBm
IF BW 300 Hz	
10 kHz ≤ frequency < 100 kHz.....	-100 dBm
100 kHz ≤ frequency ≤ 300 MHz.....	-120 dBm
IF BW 100 Hz	
10 kHz ≤ frequency < 100 kHz.....	-105 dBm
100 kHz ≤ frequency ≤ 300 MHz.....	-125 dBm

Input crosstalk

(When the analyzer is equipped with Option E5100A-100, delete this section.) Reference input (0 dBm input level at 10 kHz to 200 kHz and +5 dBm input level at 200 kHz to 300 MHz, RF attenuator: 25 dB, 50 Ω input)

Test input (RF attenuator: 0 dB, terminated with 50 Ω termination)

10 kHz ≤ frequency < 100 kHz.....	< -110 dB
100 kHz ≤ frequency ≤ 300 MHz.....	< -120 dB

Source crosstalk

(all RF OUT and input connectors are terminated with 50 Ω terminations)

Without Option E5100A-801/802/803 (at +5 dBm output level, RF attenuator: 0 dB, 50 Ω input)

10 kHz ≤ frequency < 100 kHz.....	< -110 dB (SPC)
100 kHz ≤ frequency < 250 MHz.....	< -125 dB (SPC)
250 MHz ≤ frequency ≤ 300 MHz.....	< -120 dB (SPC)

With Option E5100A-801/802/803 (at +16 dBm output level, RF attenuator: 0 dB, 50 Ω input)

10 kHz ≤ frequency < 100 kHz.....	< -120 dB (SPC)
100 kHz ≤ frequency < 250 MHz.....	< -135 dB (SPC)
250 MHz ≤ frequency ≤ 300 MHz.....	< -130 dB (SPC)

Residual response

(RF attenuator: 0 dB, except for the following points)..... < -80 dBm

50 kHz, 100 kHz, 95.825 MHz, 95.875 MHz, 159.791667 MHz, 159.825 MHz, 159.841667 MHz, 159.875 MHz, 239.75 MHz, and 239.875 MHz

Input connector.....	BNC female
With Option E5100A-705/706/707/708.....	BNC female, Type-N female (for A, B inputs)

Measurement mode

With Option E5100A-100.....	A
With Option E5100A-200 or E5100A-600.....	A/R, R/A, R, A
With Option E5100A-300.....	A/R, B/R, R/A, B/A, R/B, A/B, R, A, B
With Option E5100A-400.....	A/R, B/R, C/R, R/A, B/A, C/A, R/B, A/B, C/B, R/C, A/C, B/C, R, A, B, C

(When the measurement mode is either R/A, B/A, C/A, R/B, A/B, C/B, R/C, or A/C, the specification is SPC.)

Magnitude characteristics

Absolute characteristics

Absolute amplitude accuracy

(at 23 ±5 °C, -30 dBm input level for RF attenuator: 0 dB or -5 dBm input level for RF attenuator: 25 dB, 50 Ω input)

±1 dB

1. When the analyzer frequency is identical to the transmitted interference signal frequency, refer to "EMC" in "general characteristics."

Ratio characteristics

Frequency response¹

(at 23 ±5 °C, -30 dBm input level for RF attenuator: 0 dB or -5 dBm input level for RF attenuator: 25 dB, the same RF attenuator setting for both inputs)

50 Ω input

10 kHz ≤ frequency < 100 kHz	±1 dB
100 kHz ≤ frequency ≤ 100 MHz.....	±0.5 dB
100 MHz < frequency ≤ 300 MHz	±1 dB

1 MΩ input for Option E5100A-703/704/707/708

(using 50 Ω feedthrough)..... ±3 dB

Dynamic accuracy

(at 23 ±5 °C, 10 Hz IF BW, -10 dBm reference input level relative to maximum input level, -20 dBm test input level relative to maximum input level, except for ramp frequency sweep)

Test channel input level RF attenuator		Dynamic accuracy frequency	
25 dB	0 dB	Other	10 kHz to 50 kHz
+5 to -5 dBm ¹	-20 to -30 dBm ²	±0.4 dB	±0.4 dB (SPC)
-5 to -15 dBm	-30 to -40 dBm	±0.09 dB	±0.09 dB (SPC)
-15 to -45 dBm	-40 to -70 dBm	±0.05 dB	±0.05 dB (SPC)
-45 to -55 dBm	-70 to -80 dBm	±0.06 dB	±0.1 dB (SPC)
-55 to -65 dBm	-80 to -90 dBm	±0.1 dB	±0.3 dB (SPC)
-65 to -75 dBm	-90 to -100 dBm	±0.3 dB	±0.9 dB (SPC)
-75 to -85 dBm	-100 to -110 dBm	±0.9 dB	±3 dB (SPC)
-85 to -95 dBm	-110 to -120 dBm	±3 dB	N/A

With Option E5100A-100

(at 23 ±5 °C, 10 Hz IF BW, -20 dB input-A level relative to maximum input level, except for ramp frequency sweep, right after measuring reference)

Test channel input level RF attenuator		Dynamic accuracy frequency	
25 dB	0 dB	Other	10 kHz to 50 kHz
+5 to -5 dBm ¹	-20 to -30 dBm ²	±0.4 dB	±0.4 dB (SPC)
-5 to -45 dBm	-30 to -70 dBm	±0.1 dB	±0.1 dB (SPC)
-45 to -55 dBm	-70 to -80 dBm	±0.1 dB	±0.2 dB (SPC)
-55 to -65 dBm	-80 to -90 dBm	±0.2 dB	±0.6 dB (SPC)
-65 to -75 dBm	-90 to -100 dBm	±0.6 dB	±1.8 dB (SPC)

Trace noise

(at 1 kHz IF BW, frequency > 305 kHz, -5 dBm input level for RF attenuator: 25 dB or -30 dBm input level

for RF attenuator: 0 dB..... < 10 dBm rms

Stability..... 0.02 dB/°C (SPC)

With Option E5100A-100

(at 23 ±5 °C)..... 0.05 dB/°C (SPC)

1. Frequency response can be improved by calibration.
 2. 0 to -5 dBm at 10 kHz to 200 kHz
 3. -25 to -30 dBm at 10 kHz to 200 kHz

Phase characteristics

(When the analyzer is equipped with Option E5100A-100, delete this section.)

Measurement mode Normal/Expanded

Frequency response¹

(at 23 ±5 °C, -30 dBm input level for RF attenuator:

0 dB or -5 dBm input level for RF attenuator: 25 dB,
the same RF attenuator setting for both inputs, 50 Ω input)

10 kHz ≤ frequency < 100 kHz ±5°

100 kHz ≤ frequency ≤ 100 MHz +2.5°

100 MHz < frequency ≤ 300 MHz ±5°

Dynamic accuracy

(at 23 ±5 °C, 10 Hz IF BW, -10 dBm reference input level relative to maximum input level, -20 dBm test input level relative to maximum input level, except for ramp frequency sweep)

Test channel input level RF attenuator		Dynamic accuracy frequency	
25 dB	0 dB	Other	10 kHz to 50 kHz
+5 to -5 dBm ²	-20 to -30 dBm ³	±3°	±3° (SPC)
-5 to -45 dBm	-30 to -70 dBm	±0.6°	±0.6° (SPC)
-15 to -45 dBm	-40 to -70 dBm	±0.3°	±0.3° (SPC)
-45 to -55 dBm	-70 to -80 dBm	±0.3°	±0.6° (SPC)
-55 to -65 dBm	-80 to -90 dBm	±0.6°	±1.8° (SPC)
-65 to -75 dBm	-90 to -100 dBm	±1.8°	±6° SPC)
-75 to -85 dBm	-100 to -110 dBm	±6°	±18° (SPC)
-85 to -95 dBm	-110 to -120 dBm	±18°	NIA

Trace noise

(at 1 kHz IF BW, frequency > 305 kHz, -5 dBm input level
for RF attenuator: 25 dB or -30 dBm input level for

RF attenuator: 0 dB)..... < 50 mdeg rms

Stability..... 0.15 deg/°C (SPC)

Delay characteristics

Aperture frequency $\frac{200}{N-1}$ % to 100% of span, where N is number of points

Accuracy (at 23 ±5 °C, SPC)

In general, the following formula can be used to determine the accuracy, in seconds, of a specific group delay measurement:

$$\frac{\text{Phase accuracy [deg]}}{360 \text{ [deg]} \times \text{aperture [Hz]}} \text{ (sec)}$$

Depending on the aperture, input level, and device length, the phase accuracy used in either incremental phase accuracy or worst case phase accuracy.

1. Frequency response can be improved by calibration.
2. 0 to -5 dBm at 10 kHz to 200 kHz
3. -25 to -30 dBm at 10 kHz to 200 kHz

General characteristics

Operating conditions

When disk drive is in operation

Temperature	10 to 40 °C
Humidity (at wet bulb \leq 29 °C, without condensation)	15% \leq RH \leq 80%

When disk drive is not in operation

Temperature	5 to 40 °C
Humidity (at wet bulb \leq 29 °C, without condensation)	15% \leq RH \leq 80%

Altitude 0 to 2,000 meters

Warm-up time 30 minutes

Non-operating conditions

Temperature - 20 to 60 °C

Humidity (at wet bulb \leq 40 °C, without condensation)..... 15% \leq RH \leq 90%

Altitude 0 to 4,572 meters

Safety.....Certified by CSA-C22.2 No.1010.1-92, Based on IEC 1010-1 (1990) including Amendment 1 (1992)

EMC¹Complies with CISPR 11(1990)/EN 55011(1991): Group 1, Class A

Complies with IEC 801-2 (1991)/EN 55082-1(1992): 4 kV CD, 8 kV AD

Complies with IEC 801-3 (1984)/EN 55082-1(1992): 3 V/m

Complies with IEC 801-4 (1988)/EN 55082-1(1992):1 kV power lines, 0.5 kV signal lines

Power requirement..... 90 to 132 V or 198 to 264 V, 47 to 63 Hz, 400 VA max

Weight (depending on option)..... 12 kg (SPC)

Cabinet dimensions..... 425(W) x 177(H) x 425(D) mm (SPC)

Supplemental characteristics

Measurement function

Number of measurement channels 1 to 4

Display format..... Cartesian

Sweep parameter frequency, power

Sweep type

E5100A linear (step, ramp), list

Measurement point per sweep

E5100A 2 to 1,601

Others

Measurement calibration.....Response, response and isolation, 1-port 3-term

Display 6.5 inch color LCD, 640 x 480 dots

Flexible disk drive 720 Kbytes/1.2 Mbytes/1.44 Mbytes, DOS format, binary or ASCII format

Flash disk 256 Kbytes

Ram disk..... 256 Kbytes

Programming Instrument BASIC

GPIB ANSI/IEEE 488.2 compatible

Parallel I/O port.....

16 bit output, 8 bit input/output, TTL level

Option E5100A-005 8 bit output, 4 bit input, TTL level

Option E5100A-006 16 bit output, 8 bit input/output, TTL level

Option E5100A-007..... 16 bit output, 8 bit input, open collector, opto-isolated

Printer Parallel I/F (Centronics compatible), HP PCL

Keyboard mini-DIN (IBM PC compatible)

External video monitor output VGA

Connectors

Probe power..... +15 V (300 mA max.), -12.6 V (160 mA max.), GND nominal
(the maximum current values are total values of each probe connector)

1. When tested at 3 V/m according to IEC 801-3/1984, the averaging noise level will be within specifications over the full immunity test frequency range of 26 to 1000 MHz except when the analyzer frequency is identical to the transmitted interference signal test frequency.

EXT REF INPUT 10 MHz	
Frequency	10 MHz \pm 5 ppm
Amplitude.....	0 \pm 5 dBm (SPC)
Nominal impedance.....	50 Ω
REF OVEN (OPTION E5100A-1D5)	
Frequency (at 0 to 55 °C, 20 minutes after power ON).....	10 MHz \pm 1.0 ppm
Amplitude 2 \pm 5 dBm (SPC)	
Nominal impedance.....	50 Ω
INT REF OUTPUT	
Frequency (at 23 \pm 5 °C).....	10 MHz \pm 20 ppm
Amplitude.....	0 \pm 5 dBm (SPC)
Nominal impedance.....	50 Ω
EXT TRIGGER and EXT PROG RUN/CONT (Positive edge trigger)	
V_{ih}	+2 V to +5 V (SPC)
V_{il}	0 V to +0.5 V (SPC)
Sink current (I_s).....	$I_s \leq 0.4$ mA (SPC)
Pulse width (T_p)	$T_p \geq 20$ μ sec (SPC)

Furnished accessories


Accessories	Qty.	Keysight part number
Power cable	1	–
Sample program disk	1	E5100-180X0 ¹
CD-ROM (manuals)	1	E5100-905XX ²
Option E5100A-ABA add manuals		
Function Reference	1	E5100-900X0 ²
Programming Manual	1	E5100-900X7 ²
User's Guide	1	E5100-900X1 ²
Instrument BASIC Users Handbook	1	04155-90150
Instrument BASIC Users Handbook Supplement	1	E5100-900X5 ²
Option E5100A-0BW add Service Manual		
Service Manual	1	E5100-901X0 ²
Option E5100A-1CM rack mount kit		
Front handle kit	1	5062-3978
Option E5100A-1CP front handle kit		
Rack and handle kit	1	5062-3990
Option E5100A-1CP rack and handle kit		
Rack and handle kit	1	5062-3984
Option E5100A-1D5 high stability frequency		
BNC adapter	1	1250-1859
Option E5100A-1F0 external keyboard		
Keyboard	1	–

1. Furnished with special sample program disk (E5100-180X1) as well as the original one if Option E5100A-022/023 is designated. The number indicated by "X" in the part number of the sample program disk, is allocated for numbers increased by one each time a revision is made. The latest edition comes with the product.
- 2: The number indicated by "X" in the part number of each manual, is allocated for numbers increased by one each time a revision is made. The latest edition comes with the product.

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

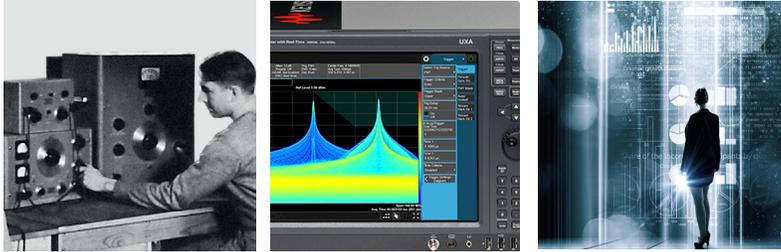

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries: www.keysight.com/find/contactus (BP-9-7-17)



www.keysight.com/go/quality
 Keysight Technologies, Inc.
 DEKRA Certified ISO 9001:2015
 Quality Management System

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.



Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.